

VINYL SOFFIT



performance **DRIVEN**

DURABILITY, EASY CARE AND FRESH GOOD LOOKS

- Easy-care vinyl never needs painting because it won't rot, peel or flake like wood.
- Vented soffit circulates air and can help improve a home's energy efficiency.
- Solid soffit adds an attractive finishing touch when ventilation isn't needed.
- A selection of sizes and colors provides design flexibility.
- Double 5" and Triple 4" panels available in brushed finish.
- Triple 3-1/3" panel available in matte finish

VYTEC[®]


VINYL SOFFIT

ENHANCE THE APPEARANCE AND PERFORMANCE OF YOUR HOME


Vytec vinyl soffit panels come in three profiles

QUICK FACTS:

Profiles: Double 5" Solid and Full Vent
Exposure: 10"
Ventilation: Perforated Full Vent (NFA 4.0 sq. in./ft.)
Panel Projection: 1/2"
Thickness: 0.040"
Length: 12'
Packaged: 2 squares/carton
Finish: Brushed
Colors: 7





Double 5" Select Soffit

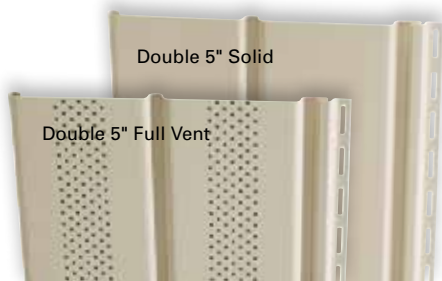


QUICK FACTS:

Profiles: Triple 4" Solid, Full Vent and Center Vent
Exposure: 12"
Ventilation: Lanced Full Vent (NFA 9.5 sq. in./ft.) Lanced Center Vent (NFA 3.2 sq. in./ft.)
Panel Projection: 3/8"
Thickness: 0.036"
Length: 12'
Packaged: 1.92 squares/carton
Finish: Brushed
Colors: 5

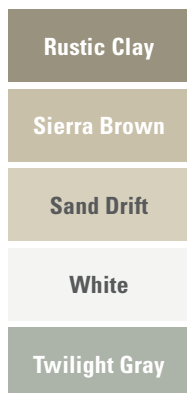


Triple 4" Soffit

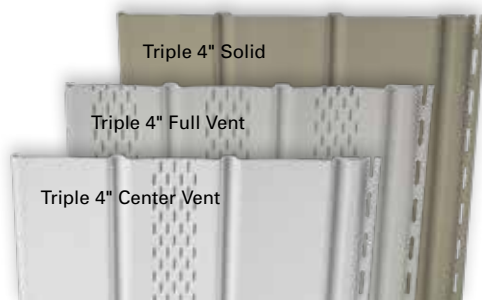

QUICK FACTS:

Profiles: Triple 3-1/3" Solid and Hidden Vent
Exposure: 10"
Ventilation: Hidden Vent (NFA 9.65 sq. in./ft.)
Panel Projection: 5/8"
Thickness: 0.040"
Length: 12'
Packaged: 2 squares/carton
Finish: Matte
Colors: 1



Triple 3-1/3" Soffit



Vytec Vinyl Soffit Specifications:

Certificate of Conformance

This certificate of conformance is provided to assist the architect or specifier in the specification of Vinyl Soffit Panel for remodeling projects or as replacement siding for existing structures, including residential and light commercial applications.

Product Specifications

Meets or exceeds the Standard Specification for Rigid PVC Soffit (ASTM D-4477) and its referenced documents. Where not defined in ASTM D-4477, our products also meet the stringent quality control standards of Vytec.

Product Test Data

Impact resistance: mean failure energy >45 in. lb.
 Surface distortion: None at 120°F
 Squareness: <1/8" of square
 Length: Within -1/4" of specification
 Warp/camber: <1/8"

Fire Resistance

Vytec vinyl siding, soffit and accessories have a Class A flame spread classification per 2018 International Building Code, when tested in accordance with ASTM E-84.

Relevant Codes and Regulations Compliance

Conforms to ASTM Specification D-4477

Color: Uniformity is spectrophotometrically controlled

Gloss: Uniformity is controlled with a 75° glossmeter

Lock: Optically measured and controlled

Colors throughout this brochure are simulated. Consult product samples before final selection.